



SINGLE ROW BALL SLEWING BEARING (EXTERNAL GEAR)

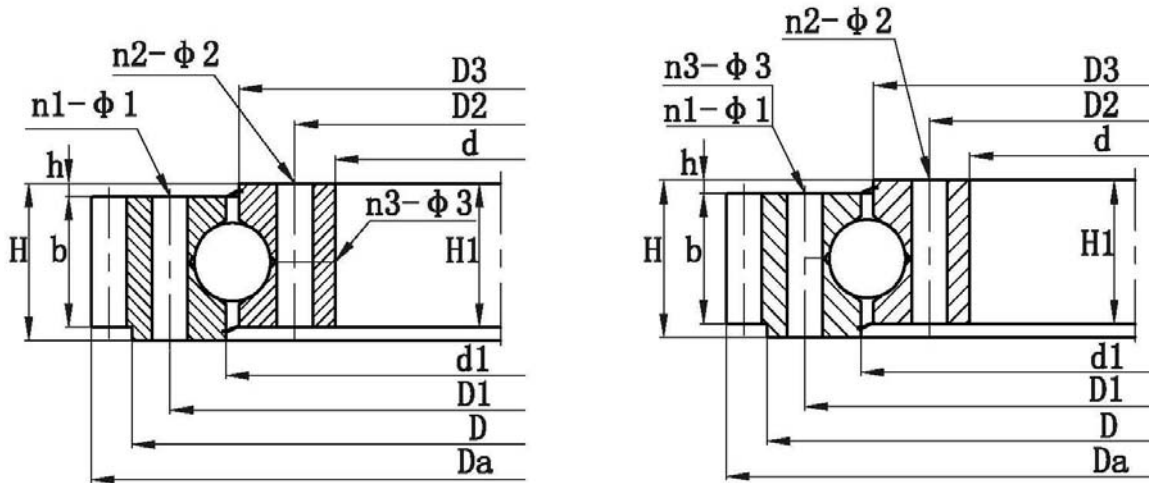

Designations	Boundary dimensions			Bolt hole diameter					Structure dimensions							Gear parameters					Basic load ratings coa	Weight
	D	d	H	D1	D2	n1	n2	φ1	φ2	D3	d1	H1	h	n3	φ3	m	Da	Z	b	x		
	mm			mm				mm		mm						mm				mm		10 ⁴ N
EGSBM 694.470.77	694	470	77	630	500	18	18	M16	18	567.5	564.5	64	13	6	M10*1	6	696	114	60	0	157	93.1
EGSBM 786.600.72	786	600	72	740	636	24	20	M18*2.5	19	689	691	60	7	4	ZG1/8in	6	789	131	50	0	107	94.1
EGSBM 853.674.70	853	674	70	825	709	23	34	20	M20	764	768	59	10	2	ZG1/8in	7	889	125	50	0	183	89
EGSBM 853.674.70	853	674	70	825	709	24	34	18	18	764	768	59	10	2	ZG1/8in	7	889	125	50	0	183	88.6
EGSBM 894.710.67	894	710	67	845	744	8	8	M10	M10	798	806	58	9	3	M10*1	6	924	152	55	0	179	107
EGSBM 894.710.67	894	710	67	875	760	12	8	M10	M12	798	806	58	9	3	M10*1	6	924	152	55	0	179	107
EGSBM 894.710.67	894	710	67	865	744	20	20	13	13	798	806	58	9	4	M10*1	6	924	152	55	0	179	107
EGSBM 1050.800.90	1050	800	90	1012	838	30	30	20	20	923	927	76	16	3	M10*1	6	1092	180	60	0	215	217
EGSBM 1050.800.90	1050	800	90	1012	838	30	30	20	20	923	927	76	16	3	M10*1	6	1092	180	60	0	215	217
EGSBM 1335.1060.109	1335	1060	109	1295	1105	24	24	M20	22	1198	1202	100	9	4	M8*1	10	1388	138	80	-0.6	501	407
EGSBM 1365.1075.120	1365	1075	120	1310	1130	36	36	26	26	1218	1222	105	15	4	m8*1	8	1424	176	90	0	463	463
EGSBM 1365.1075.130	1365	1075	130	1310	1130	36	36	24	24	1218	1222	105	10	--	--	10	1420	140	120	0	463	550
EGSBM 1365.1075.120	1365	1075	120	1310	1130	36	36	24	24	1218	1222	105	15	4	M10*1	10	1424.91	138	90	+1.4	463	463
EGSBM 1365.1075.120	1365	1075	120	1310	1130	36	36	M24	26	1218	1222	105	15	4	M8*1	8	1424	176	90	0	463	463
EGSBM 1475.1330.82.4	1475	1330	82.4	1510	1362	24	24	18.5	18.5	1439	1445	70	12.4	6	M10*1	9	1584	174	70	0	353	280
EGSBM 1407.1352.100	1407	1352	100	1370	1404	13	18	M8	M10	1390	1394	63	--	8	6	4.5	1449	320	60	0	216	143
EGSBM 2050.1640.160	2050	1640	160	1990	1710	30	30	28	28	1844	1856	140	20	2	M14*1.5	10	2108	210	105	-0.6	1118	1264
EGSBM 1945.1700.120	1945	1700	120	1900	1750	24	24	M18	21	1825	1845	110	10	4	M10*1	5	1970	392	35	0	405	516
EGSBM 2052.1700.100	2052	1700	100	1980	1780	4	24	20	M18	1878	1882	97	10	4	M14*1.5	5	2080	414	50	0	551	678
EGSBM 2885.2650.100	2885	2650	100	2850	2700	48	48	M20	M20	2777	2781	80	10	6	ZG1/4in	12	2949.6	244	80	0	913	751

SINGLE ROW BALL SLEWING BEARING (EXTERNAL GEAR)

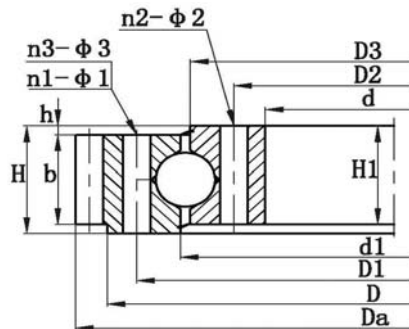

Designations	Boundary dimensions			Bolt hole diameter				Structure dimensions							Gear parameters								Basic load ratings coa	Weight
external gear type	D	d	H	D1	D2	n	φ	D3 (D3')	d1 (d1')	H1	h	n3	φ3	m	Da	Z	da	Z	b	x				
	mm			mm		mm		mm					mm		mm		mm		mm		10 ⁴ N	kg		
EGSBM 602.398.80	602	398	80	566	434	20	18	498.5	501.5	70	10	4	m10x1	5	630	123	365	74	60	+0.5	129	75.8		
EGSBM 662.458.80	662	458	80	626	494	20	18	558.5	561.5	70	10	4	m10x1	5	690	135	425	86	60	+0.5	144	94		
EGSBM 732.528.80	732	528	80	696	564	24	18	628.5	631.5	70	10	4	m10x1	6	774	126	492	83	60	+0.5	187	110		
EGSBM 812.608.80	812	608	80	776	644	24	18	708.5	711.5	70	10	4	m10x1	6	852	139	570	86	60	+0.5	212	120		
EGSBM 922.678.100	922	678	100	878	722	30	22	798.5	801.5	90	10	6	m10x1	8	968	118	632	80	80	+0.5	313	256		
EGSBM 1022.778.100	1022	778	100	978	822	30	22	898.5	901.5	90	10	6	m10x1	8	1064	130	736	93	80	+0.5	355	240		
EGSBM 1122.878.100	1122	878	100	1078	922	36	22	998.5	1001.5	90	10	6	m10x1	10	1190	116	820	83	80	+0.5	394	305		
EGSBM 1242.998.100	1242	998	100	1198	1042	36	22	1118	1122	90	10	6	m10x1	10	1300	127	940	95	80	+0.5	443	300		
EGSBM 1390.1110.110	1390	1110	110	1337	1163	40	26	1248	1252	100	10	6	m10x1	12	1452	118	1044	88	90	+0.5	554	420		
EGSBM 1540.1260.110	1540	1260	110	1487	1313	40	26	1398	1402	100	10	6	m10x1	12	1608	131	1188	100	90	+0.5	617	480		
EGSBM 1740.1460.110	1740	1460	110	1687	1513	45	26	1598	1602	100	10	8	m10x1	14	1820	127	1386	100	90	+0.5	702	550		
EGSBM 1940.1660.110	1940	1660	110	1887	1713	45	26	1798	1802	100	10	8	m10x1	14	2016	141	1568	113	90	+0.5	793	610		
EGSBM 2178.1825.144	2178	1825	144	2110	1891	48	33	1998	2002	132	12	8	m10x1	16	2272	139	1728	109	120	+0.5	1210	1100		
EGSBM 2418.2065.144	2418	2065	144	2350	2131	48	33	2237.5	2242.5	132	12	8	m10x1	16	2496	153	1984	125	120	+0.5	1350	1250		
EGSBM 2678.2325.144	2678	2325	144	2610	2391	56	33	2497.5	2502.5	162	12	8	m10x1	18	2772	151	2232	125	120	+0.5	1500	1400		
EGSBM 2978.2625.144	2978	2625	144	2910	2691	56	33	2797.5	2802.5	162	12	8	m10x1	18	3078	168	2520	141	120	+0.5	1680	1600		
EGSBM 3376.2922.174	3376	2922	174	3286	3014	56	45	3147.5	3152.5	162	12	8	m10x1	20	3480	171	2820	142	150	+0.5	2380	2800		
EGSBM 3776.3322.174	3776	3322	174	3686	3414	56	45	3547.5	3552.5	162	12	8	m10x1	20	3880	191	3220	162	150	+0.5	2690	3200		
EGSBM 4226.3772.174	4226	3772	174	4136	3864	60	45	3997.5	4002.5	162	12	10	m10x1	22	4334	194	3652	167	150	+0.5	3020	3600		
EGSBM 4726.4272.174	4726	4272	174	4636	4364	60	45	4497.5	4502.5	162	12	10	m10x1	22	4840	271	4158	190	150	+0.5	3410	4000		